

**DESCRIPTION**

F PUSH-ON Water Proof Male Compression Connector 3,9/5,6  
suitable for INDOOR and OUTDOOR Installation

Easy Installation without tooling

**CODICE**

**FCPO3,9C**



Suitable for cables:


Series DG80, Series SAT501, Series VS80

**Technical Characteristics**

Impedance:	75 Ohm
Operational:	to 3 GHz
Shielding Efficiency:	better than the once of cable
Max. Tensile Strength:	200 N
Operating Temperature:	- 5° to 85 °C
Plating:	NITIN, salty air resistant (tested till 500 hours)
Water Proof Sealing:	by internal and external O-Rings

**INSTRUCTIONS for the use**

1. Cut the cable as per instructions below, easy made by the Stripper CS00.  
Fold back the braid over the jacket.

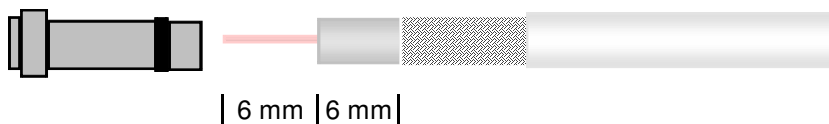

2. Slide the cable into the connector till the conductor comes out from its front.
3. Tighten the male connector on any female interface by hand or better by a wrench.  
It is self-fastening to the cable and it remains fastened even after dismantling from the unit.

**ITALIANA CONDUTTORI s.r.l**

V.le Zanotti 90 - 27027 Gropello Cairoli (PV)- Italy  
Tel. 0382-815150 - Fax: 0382-814212

**DATE**

Jan 19th, 2012

**RESPONSIBLE**

R. Grumi